

Pop-up Sprinkler S-CS with strip nozzle, Art. No. 1552



Drift tryck (bar)	Flöde l/h	Max kastlängd meter	Kastbredd meter
1	360	11	2
2	500	12	2
3	610	14	2
4	700	16	2
5	770	17	2
6	850	18	2

Pop-up Sprinkler S-ES with endline strip nozzle, Art. No. 1553





Drift tryck (bar)	Flöde l/h	Max kastlängd meter	Kastbredd meter
1	190	5.5	2
2	280	6	2
3	330	7.5	2
4	380	8.5	2
5	430	9.5	2
6	450	10	2

Tryckförlust magnetventil

Flöde l/h	Tryckförlust bar
1000	0.20
2000	0.20
3000	0.20
4000	0.16
5000	0.24
6000	0.34
7000	0.45

Friktions förlust PEM

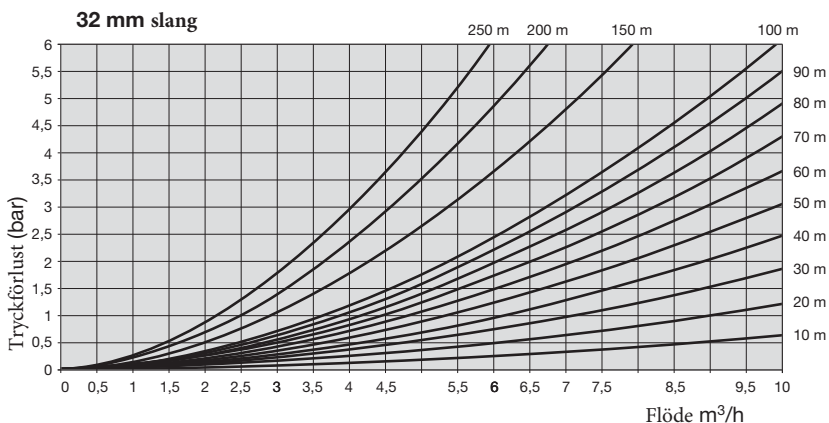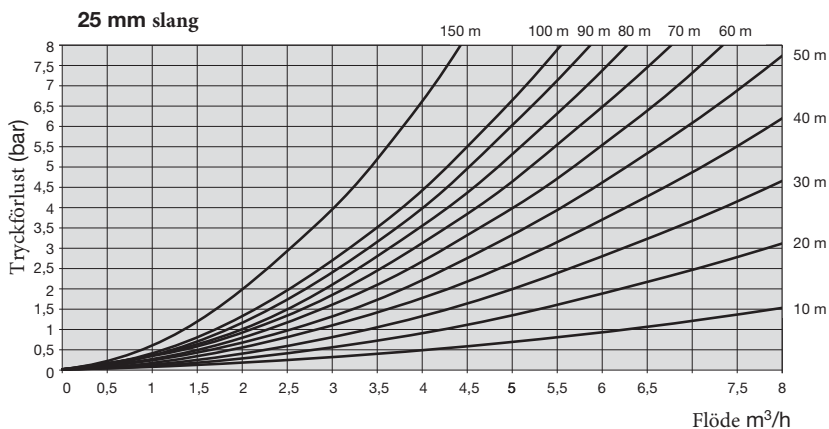

Anslutnings kabel 24 V

Max längd anslutningskabel 24 volt

Tvärnsnittyta	Max längd
0.50 mm ²	30 m
0.75 mm ²	45 m
1.00 mm ²	200 m
1.50 mm ²	300 m