

**GARDENA Sprinkler S30/S50/S80**



Spridar sektor	Drift tryck (bar)	S30 art 1554-29		S50 art 1555-29		S80 art 1569-29	
		Max kastlängd meter	Flöde l/h	Max kastlängd meter	Flöde l/h	Max kastlängd meter	Flöde l/h
90°	1	2	90	3	130	4	150
	2	3	130	4	190	5	240
	3	3.5	160	4.5	230	5.5	290
	4	3.5	180	4.5	270	6	330
	5	4	200	5	320	6.5	360
	6	4	230	5	340	7	390
180°	1	2	170	2.5	260	4	300
	2	3	260	4	380	5	480
	3	3	310	4	460	5.5	580
	4	3	360	4	540	6	660
	5	3.5	390	4.5	620	6	730
	6	3.5	450	4.5	670	6.5	780
270°	1	2	280	2.5	380	4	450
	2	3	390	4	560	5	720
	3	3	500	4	690	5	870
	4	3	570	4	790	6	990
	5	3.5	630	4.5	920	6	1,100
	6	3.5	700	4.5	980	6.5	1,170
360°	1	2	380	2.5	510	4	600
	2	3	520	4	750	5	960
	3	3	670	4	900	5.5	1,160
	4	3.5	750	4	1,050	6	1,300
	5	3.5	850	4.5	1,180	6	1,400
	6	3.5	920	4.5	1,280	6	1,480

**Magnetventiler**

**Tryckförlust magnetventil**

Flöde l/h	Tryckförlust bar
1000	0.20
2000	0.20
3000	0.20
4000	0.16
5000	0.24
6000	0.34
7000	0.45

**Friktions förlust PEM**

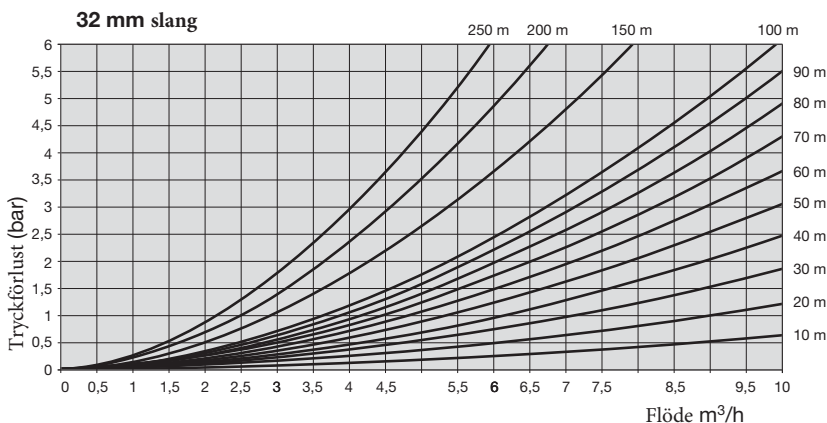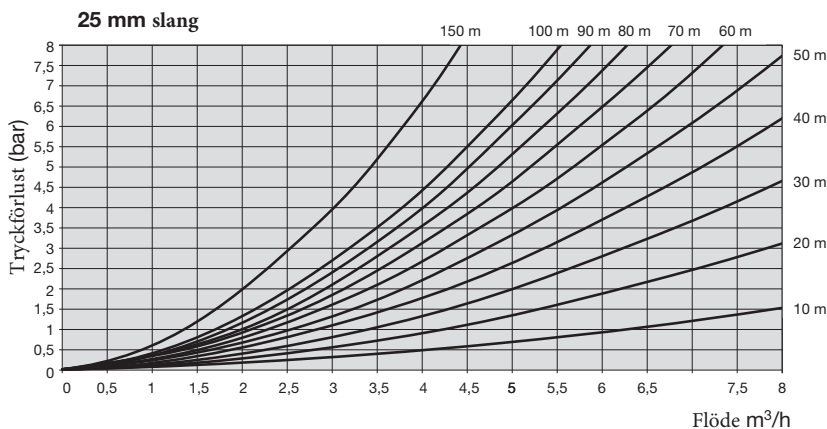

**Anslutnings kabel 24 V**

**Max längd anslutningskabel 24 volt**

Tvärnsnittyta	Max längd
0.50 mm <sup>2</sup>	30 m
0.75 mm <sup>2</sup>	45 m
1.00 mm <sup>2</sup>	200 m
1.50 mm <sup>2</sup>	300 m