

**GARDENA Sprinkler Turbosprinkler T200 art 8203-29/8204-29 Hva 9664094-01**

| Spridar sektor | Drift tryck (bar) | Max kastlängd meter | Flöde l/h |
|----------------|-------------------|---------------------|-----------|
| 25° – 90°      | 1                 | 7                   | 180       |
| Munstycke 1    | 2                 | 9                   | 280       |
|                | 3                 | 9                   | 380       |
|                | 4                 | 10                  | 450       |
|                | 5                 | 10                  | 500       |
|                | 6                 | 10.5                | 550       |
| 91° – 180°     | 1                 | 7                   | 260       |
| Munstycke 2    | 2                 | 8                   | 380       |
|                | 3                 | 9                   | 490       |
|                | 4                 | 10                  | 630       |
|                | 5                 | 10                  | 660       |
|                | 6                 | 10.5                | 700       |
| 181° – 270°    | 1                 | 6                   | 320       |
| Munstycke 3    | 2                 | 8                   | 480       |
|                | 3                 | 9                   | 600       |
|                | 4                 | 10                  | 760       |
|                | 5                 | 10                  | 820       |
|                | 6                 | 10.5                | 870       |
| 271° – 360°    | 1                 | 5                   | 380       |
| Munstycke 4    | 2                 | 8                   | 620       |
|                | 3                 | 9                   | 780       |
|                | 4                 | 9.5                 | 900       |
|                | 5                 | 10                  | 1,000     |
|                | 6                 | 10.5                | 1,100     |




**Magnetventiler**

**Tryckförlust magnetventil**

| Flöde l/h | Tryckförlust bar |
|-----------|------------------|
| 1000      | 0.20             |
| 2000      | 0.20             |
| 3000      | 0.20             |
| 4000      | 0.16             |
| 5000      | 0.24             |
| 6000      | 0.34             |
| 7000      | 0.45             |

**Friktions förlust PEM**

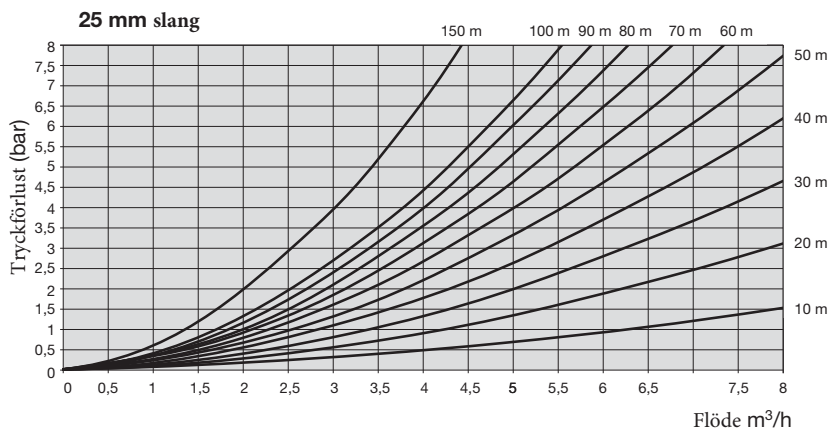

**Anslutnings kabel 24 V**

**Max längd anslutningskabel 24 volt**

| Tvärnsnittyta        | Max längd |
|----------------------|-----------|
| 0.50 mm <sup>2</sup> | 30 m      |
| 0.75 mm <sup>2</sup> | 45 m      |
| 1.00 mm <sup>2</sup> | 200 m     |
| 1.50 mm <sup>2</sup> | 300 m     |

